

**triogen<sup>®</sup> TOGC XIS is a corona discharge ozone generator with variable output, complete with an integrated oxygen concentrator, compressor, ozone injector and booster pump. These models produce up to 55g O<sub>3</sub>/h for smaller industrial ozone applications.**

## APPLICATIONS

- Industrial oxidation process
- Drinking water
- Bottled water
- Aquaculture
- Cooling Towers
- F&B Industry

## MAIN FEATURES

- Ozone generator producing up to 55g/h for industrial use
- Feed gas: oxygen (PSA)

## TECHNOLOGY

The TOGC XIS ozone generator is a free-standing unit specifically designed for industrial use.

The system incorporates function indicators, feed gas flowmeter, oxygen concentrator and variable output control.

The unit incorporates a compressor driven oxygen concentrator with automatically regenerated desiccant columns and all necessary flow control equipment.

## HOW IT WORKS

Ozone is produced when oxygen gas is passed over the ceramic dielectric of an ozone generating module. The module is powered by a high voltage/high frequency power board. A variable module power supply enables electronic control of the ozone production rate.

The electronic power board is designed for continuous operation, with the added safety feature of 'fold back' short circuit protection.

The dielectric is housed within a finned heat sink block, which is air cooled by fan assisted atmospheric air on the TOGC 8XIS and 13XIS, and water cooled on the TOGC 45XIS and 55XIS.

## PRODUCT HIGHLIGHTS

- Variable ozone output up to 55g O<sub>3</sub>/h
- Fitted with an oxygen concentrator, compressor, injector and booster pump
- Operating and maintenance manual including performance graphs
- Illuminating switches indicating ozone production and faults
- Fans assisted air cooling
- Full twelve month warranty and technical backup facilities



TECHNICAL DATA MODEL	Max.Ozone output g/h	Oxygen flowrate l/min	Variable output control %	Power supply V / ph/Hz	Power Consumption W	Cooling water (l/h)
TOGC 8X	8	5	20-100	230/1/50 OR 115/1/60	600	-
TOGC 13X	13	5	20-100		650	-
TOGC 45X	45	5	20-100		1500	90
TOGC 55X	55	8	20-100		1500	90

- Feed gas: Oxygen
- Injector Pump Flowrate: 1.5m<sup>3</sup>/h

## STANDARDS

- Protection Class: IP54
- Conformity: CE

## PROCESS CONNECTIONS

- Inlet 1" BSP female thread (Pump)
- Outlet 1" plain uPVC union


## REMOTE CONTROL AND ALARMS

- Ozone ON-OFF Fault
- Feed gas, booster pump faults
- Oxygen flowmeter
- External output control
- Fans assisted air cooling

## MATERIAL OPTIONS

1. Standard - mild steel skid & PVC piping
2. Option - stainless steel skid & PVC piping
3. Option - mild steel skid & stainless steel piping
4. Option - stainless steel skid & stainless steel piping

MODEL	Panel (mm/inch)					Inlet		Outlet		l x H x W		Weight	
	A	B	C	D	E	DN	inch	DN	inch	mm	inch	kg	lb
TOGC 8XIS	220/8.7	300/11.8	80/3.1	85/3.3	105/4.1	25	1	25	1	600 x 1675 x 450	24 x 66 x 18	83	183
TOGC 13XIS												85	187
TOGC 45XIS	245/9.6	325/12.8	80/3.1	105/4.1	85/3.3					650 x 1675 x 500	25.6 x 65.9 x 19.7	128	282
TOGC 55XIS													

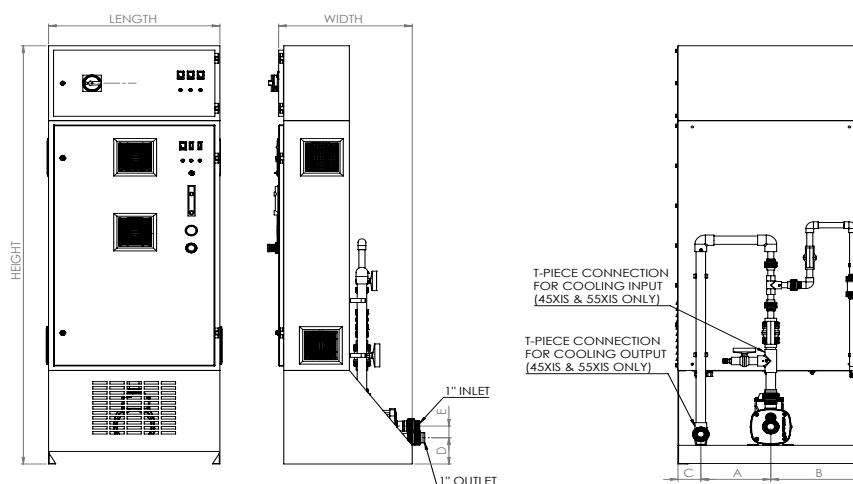

## CONTACT

Triogen Limited  
Unit 14 Langlands Place, East Kilbride G75 0YF  
Scotland, United Kingdom  
Tel: + 44 (0) 13 55 220 598  
Fax: + 44 (0) 13 55 570 058  
www.triogen.com  
info@triogen.com



Your local distributor: